

FOOD SERVICE

STANDARD FEATURES

- Long service life, non-deflating wheel with a bronze bearing
- Wheels are interchangeable with Standard sized heavy duty rigs
- Thermoplastic rubber and polyurethane treads available



Thermoplastic Rubber Wheel

The patented Navigator wheel is designed to transition over uneven terrain surfaces. The internal spring suspension inside the wheel, eliminates the push-back effect of the wheel hitting objects such as doorjamb, cords, and carpet divider strips and enables the cart to climb over the rough or high spot with ease, while absorbing the impact of the load the cart is carrying.

Applications: Dish Carts, Mobile refreshment Stands, Hospital/Service Carts, Standard Service Carts, Food Prep Carts, Insulated Food/Beverage Service Carts, Silverware and Tray Carts, Equipment Stands, Utility Carts, Bussing/Transport Carts, Queen Mary Carts, Utility Trucks, Platform Trucks, Mobile Vending Carts, and Mobile Salad Bars.



Mobile Salad Bar



Service Cart



Utility Truck



Queen Mary Cart




Equipment Stand



Silverware and Tray Cart

Cushioning Springs That Enable Wheel To Climb Over Obstacles

Bronze Bearing

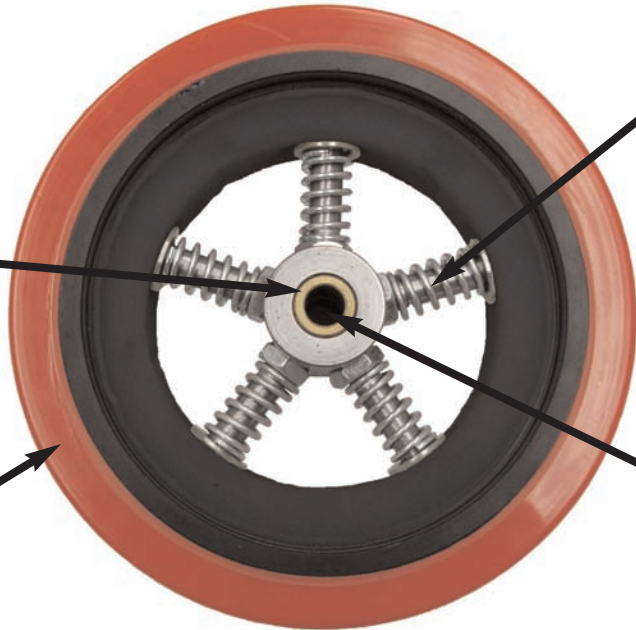

Polyurethane Tread

Bore Size Fits 1/2" Axle

Caster Specifications

| Wheel Dia. (Inches) | Load Capacity* (Lbs.) | Wheel Bearing | Overall Height (In.) | Swivel Radius (In.) | Approximate Weight (Lbs.) ^t | Swivel Part Number | Swivel w/ Brake Part Number | Rigid Part Number | |
|--|-----------------------|---------------|----------------------|---------------------|--|--------------------|-----------------------------|-------------------|-----------------|
| Thermoplastic Rubber Tread on Nylon Wheel | | | | | | | | | |
| 6 | 2 | 300 | Bronze | 7½ | 4⅞ | 5¾ | 8W8806Z26000190 | 8W8806Z26002190 | 1F8306Z26000190 |
| 6 | 2 | 300 | Bronze | 7½ | 4⅞ | 5¾ | 4F8806Z260001AR | 4F8806Z260021AR | 4F8306Z260001AR |
| Polyurethane Tread on Nylon Wheel | | | | | | | | | |
| 6 | 2 | 300 | Bronze | 7½ | 4⅞ | 5¾ | 8W8806Z25000190 | 8W8806Z25002190 | 1F8306Z25000190 |
| 6 | 2 | 300 | Bronze | 7½ | 4⅞ | 5¾ | 4F8806Z250001AR | 4F8806Z250021AR | 4F8306Z250001AR |

(t) Weight represents a swivel caster (Brake version will be ½ lb. more and Rigid will be ½ lb. less).
 (*) Internal springs can be adjusted to achieve load rating.

Top Plate Dimensions

| Plate Type | Plate Dimensions | |
|------------|------------------|------------------------------|
| | Overall Size | Mounting Dimensions |
| 90 | 4" x 4⅝" | 2⅝" x 3⅝" slotted to 3" x 3" |

| Plate Type | Plate Dimensions | |
|------------|------------------|---------------------|
| | Overall Size | Mounting Dimensions |
| AR | 2¾" x 3¾" | 1¾" x 2⅞" x 3" |

**Driven
to Exceed
Expectations
800-558-0117**

www.erwagner.com